



## Off-delay Timer Switch

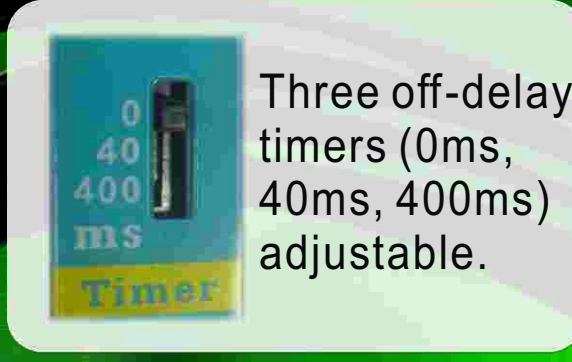


Three off-delay timers (0ms, 40ms, 400ms) adjustable.

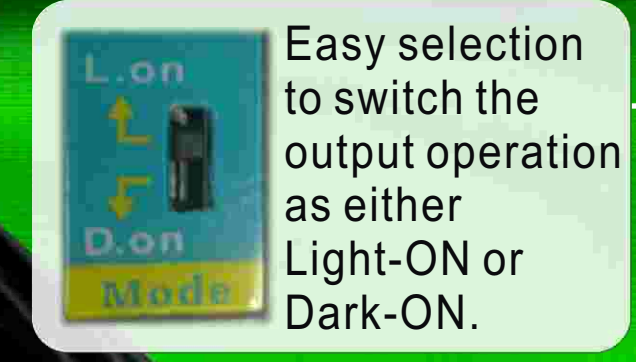

Easy selection to switch the output operation as either Light-ON or Dark-ON.


## L.on / D.on Switch

## 20-turn Sensitivity Adjuster

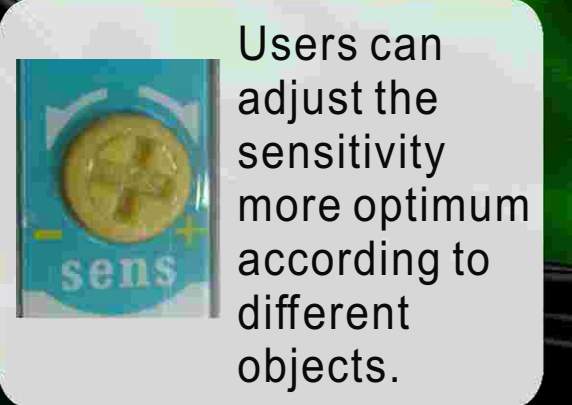

Users can adjust the sensitivity more optimum according to different objects.

## Fiber Lock Level

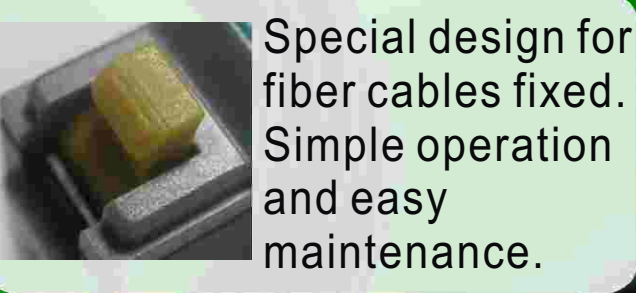

Special design for fiber cables fixed. Simple operation and easy maintenance.



## Glass Fiber Optics Operating Temperature: -40°C~+300°C


| Thru-beam Type        | Reflective Type        |
|-----------------------|------------------------|
| <b>FGT-0815-10</b>    | <b>FGR-0815-15-H20</b> |
| <b>FGT3-IT23SM900</b> | <b>FGR-0815-10</b>     |
| <b>FGT-475D</b>       | <b>FGR3-BT23SM900</b>  |
| <b>FGT3-0505-10</b>   | <b>FGR-810</b>         |
| <b>FGT10-1313-25</b>  | <b>FGR-620</b>         |
| <b>FGT-11-20</b>      | <b>FGRC-610</b>        |
| <b>FGT-11W</b>        | <b>FGR-415-M-H01</b>   |
| <b>FGT-12-20</b>      | <b>FGR-415-M</b>       |
| <b>FGTX-403U</b>      | <b>FGR-A355ML-20</b>   |
|                       | <b>FGRX-LT31-45</b>    |

## Plastic Fiber Optics Operating Temperature: -55°C~+70°C

| Thru-beam Type      | Reflective Type           |
|---------------------|---------------------------|
| <b>FT-420-S67</b>   | <b>FRE-310-S15</b>        |
| <b>FTD-210-32</b>   | <b>FRC-310-35FZ+FLM03</b> |
| <b>FTW2-475D</b>    | <b>FRC4-110</b>           |
| <b>FTH-320-DQ</b>   | <b>FRW-11-10</b>          |
| <b>FTC4-110-H10</b> | <b>FRY-67TZ-20</b>        |
| <b>FTY-77TZ-20</b>  | <b>FR-20ML</b>            |
| <b>FTW-10ML-10</b>  | <b>FRB-38V-20</b>         |
| <b>FT-15ML</b>      | <b>FRD-FU901</b>          |
| <b>FT-30ML-20</b>   | <b>FRW-K10-20</b>         |
| <b>FTA-SU10</b>     | <b>FR-30ML-20</b>         |
| <b>FTA-SU05</b>     | <b>FR-30ML-20</b>         |

\* For detailed specifications, please visit our website at [www.riko.com](http://www.riko.com).

## ◆ Dimensions:

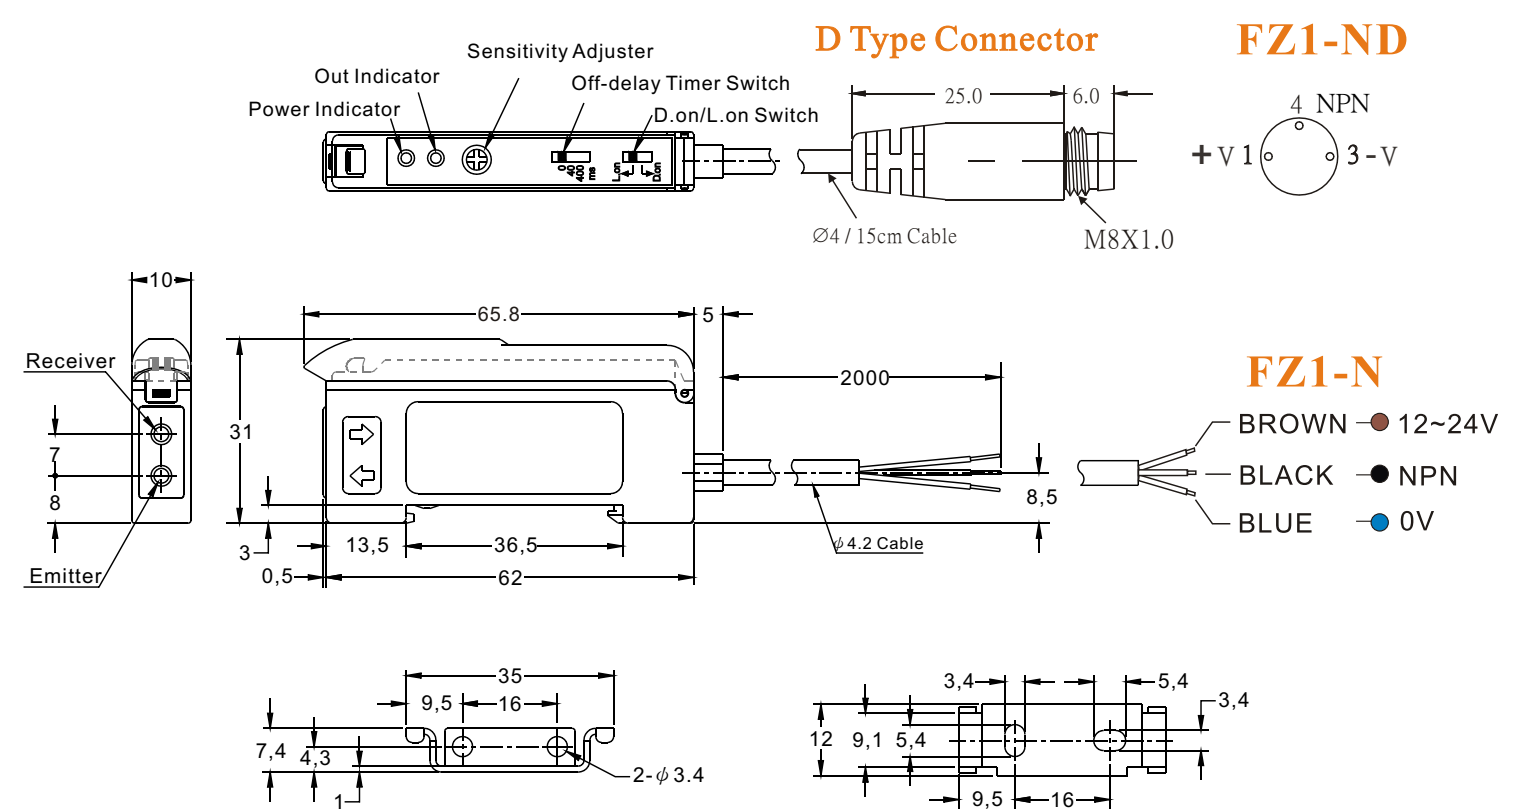

- Ultra-Slim**  
 10 mm thickness only, to enlarge an open space for your operation and allow for easy mounting in the side-by-side configuration.
- 20-turn Sensitivity Adjuster**  
 The sensitivity adjuster is the 20-turn trimmer. Users can adjust the sensitivity more optimum according to different objects.
- Off-delay Timer Adjustable Function**  
 Three off-delay timers (0ms, 40ms, 400ms) can be switched according to different environments.
- Short Circuit Protection / Reverse Polarity Protection**  
 The FZ1 series will activate the **short circuit protection / reverse polarity protection** to reduce the damage caused by the wrong operation.